

TECHNICAL DATASHEET

Airflow 3TM CARTRIDGE 310ml



A single component pneumatic bead applicator for cartridges



PRODUCT FEATURES:

- Compact tool which is ideal for use in tight spaces.
- Built-in silencer (less than 70dB) for user-friendly environment.

• 6.8bar (100psi) regulator as standard (others available).

Standard:
Options available:

6.8 bar (100 psi)
3.4 bar (50 psi)

5.2 bar (75 psi)

8.5 bar (125 psi)





Output of around 150L/min (5cfm) with receiver tank from 10L (PC Cox recommends 50L for long tool life)

Airline/Hose

Connector Options.
Standard applicator provided without a connector, can be bought separately.

Air tool with exhaust valve (rapid depressurisation when trigger is released)

The Cox Airflow 3 is part of a range of mid-powered pneumatic applicators. Designed for use with low to medium viscosity sealants and adhesives, the Airflow 3 is ideal for professional and semi-professional users.

For more information call +44(0)1635 264500 Or visit www.pccox.co.uk











TECHNICAL DATASHEET

Airflow 3TM CARTRIDGE 310ml



A single component pneumatic bead applicator for cartridges

APPLICATIONS:

- · For low to medium viscosity
- · Cartridge: 1-component
- Cartridge volume: 310ml

SPECIFICATIONS:


- Max Pneumatic Pressure: 6.8bar (100psi) (others available)
- Barrel Length: 234.7mmMaximum Thrust: 1.5kN
- Tool Weight: 600g
- Tool Material: Glass filled nylon handle, anodised aluminium barrel
- Certificates: ISO, REACH, CE, EN
 Packaging Options: 1 per box

WEB LINKS:

- Academy video www.pccox.co.uk/en/cox-academy
- Spare parts diagram www.pccox.co.uk/en/explodeddiagrams

OTHER MODELS AVAILABLE:

- · Airflow 3 Compact Combi
- Airflow3 Sachet
- · Airflow 3 Combi
- · Airflow 3 Combi HP

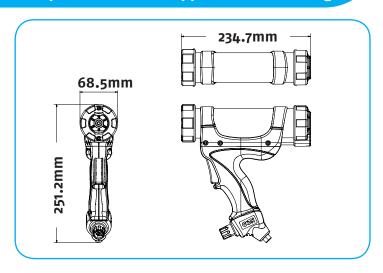

CARTRIDGE:

310ml:



PRODUCT RANGE BY POWER:



PC Cox Ltd., Turnpike Road, Newbury, Berkshire, RG14 2LR T Sales +44 (0) 1635 264500 F +44 (0) 1635 264555 E sales@pccox.co.uk www.pccox.co.uk

