



EU-TYPE EXAMINATION CERTIFICATE

The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.



Certificate N° 0075/3122/162/04/19/1280

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer : GUMMI ROLLER S.a.r.l.
ZARE EST NO 6, 4385 EHLERANGE, LUXEMBOURG
LUXEMBOURG

Description

PPE Type : *protective glove against mechanical risks, thermal risks, welding risks*


Product reference : 8081906

Article code : /

Glove description : Brown cow grain leather palm ,brown cow split leather back and natural cow split leather cuff weld glove

Available sizes : 8 9 10 11 12

Pictures :

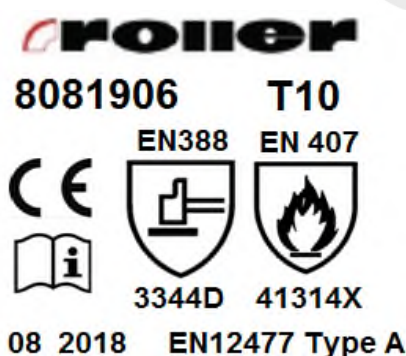

GUMMI-ROLLER S.a.r.l.
Zare est n°6,L-4385
Ehlerange
Luxembourg
www.roller-tech.eu

Reference standard :

Levels of performance / class of protection

EN 420:2003+A1:2009

-

EN 388:2016

3 3 4 4 D

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

EN 407:2004

4 1 3 1 4 X

EN 12477:2001/A1:2005

Type A

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the Instruction for Use index 01 dated from APRIL, 2019

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425.

Issued in Lyon by
Maxence DREVET
Project Certification Manager

Date of first issue : 17 April 2019
End of validity date : 17 April 2024



[Signature]

In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.

www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

Original CTC



GUMMI ROLLER S.a.r.l.

MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

Reference of the product	:	8081906
Article code	:	/
Technical file index	:	01
Last update	:	APRIL, 2019

IDENTIFICATION

Reference of the product :	:	8081906
Article code :	:	/
Basic Model		
Technical file index :	:	01
Last update :	:	APRIL, 2019

Manufacturer :

GUMMI ROLLER S.a.r.l.

ZARE EST NO 6, 4385 EHLERANGE, LUXEMBOURG

LUXEMBOURG

tel : 352 48 15 451

fax : 352 40 03 09

Factory :

SUNPEARL SAFETY LTD

Dalang Industrial Park XiaoXiang Town Gaoyao district – 526123 Zhaoqing city
Guangdong province PR CHINA

CHINA

tel: 00 86 758 8290888

fax: 00 86 758 8290008

GLOVE DESCRIPTION

General glove description :

Brown cow grain leather palm ,brown cow split leather back and natural cow split leather cuff weld glove
type of coating finish : no coating

Visual description (picture back and palm sides) :



Field of use

Welding industry, Construction site

Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)			
		Applicable	Covered by
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§1.4	Manufacturer's instructions and information is available	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.5	PPE which may be caught up during use	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§2.14	Multi-risk PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.3	The PPE is intended to protect against mechanical injuries	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.6	Protection against heat and/or fire	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking

Available sizes :

Minimum length of glove (mm)	Sizes
330	8
340	9
350	10
360	11
370	12

Glove constitution :

	Reference	Color	Material	Surfacic mass	Gauges	Thickness
Palm	BBWBC12	BROWN	COW GRAIN LEATHER			1.0 - 1.2 MM
Back	CSWBC12	BROWN	COW SPLIT LEATHER			1.2 - 1.4 MM
Lining	902613	YELLOW	PALM/BACK LINING : ARAMID/GLASS FIBER	320 G/M²	13G	
Cuff	CCNGG12	NATURAL	COW SPLIT LEATHER			1.2 - 1.4 MM

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425.

This glove is designed for against mechanical risks, thermal risks, welding risks.

It is a category II product.

GENERAL REQUIREMENTS

Standard EN 420 : 2003 + A1 : 2009

Dexterity : 4

Size : conform

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Mechanical hazard EN 388 : 2016

Protection offered	Performance levels
Abrasion resistance	3
Blade cut resistance	3
Tear strength resistance	4
Puncture resistance	4
Cut Resistance method (EN ISO 13997)	D
Impact Protection	-

The levels of performance have been measured on the palm

Thermal hazard EN 407 : 2004

Protection offered	Performance levels
Burning behaviour	4
Contact heat	1
Convective heat	3
Radiant heat	1
Small splashes of molten metal	4
Large quantities of molten metal	X

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

Protective gloves for welders EN 12477 : 2001/A1 : 2005

		Abrasion resistance	Cut resistance	Tear strength	Perforation resistance	Burning behaviour	Contact heat
Minimum performance require	Type A	2	1	2	2	3	1
	Type B	1	1	1	1	2	1
Performance obtained		3	3	4	4	4	1

		Convective heat: glove + cuff	Resistance to small splashes of molten metal	Dexterity
Minimum performance require	Type A	2	3	1
	Type B	—	2	4
Performance obtained		3	4	4

In conformity with type A : Is recommended for applications without high dexterity


TEST REPORTS

Laboratory	CTC	Other
EN 420 + innocuousness	D181018712_1, D180814937_1, D180814940_1	
EN 388	D180814937_1	
EN 407	D180814937_1, D180816095_1	

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : 8081906

Article Code : /

Size indicator

Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Address of Manufacturer :

Date of Manufacture (month/year) and/or Serial number :

Marking example :



Method of marking on the glove :

Both print and label

Packaging :

10 pairs/clear polybag, 50 pairs/carton

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Declaration of conformity :

Available on : <http://www.roller-tech.eu>

INSTRUCTION FOR USE

GUMMI ROLLER S.a.r.l.

ZARE EST NO 6, 4385 EHLERANGE, LUXEMBOURG
LUXEMBOURG

Glove reference : 8081906

Article code: /

User notice index : 01

Last update : APRIL, 2019

Available sizes : 8 9 10 11 12

roller

8081906

T10

EN388

EN 407



3344D

41314X

08 2018 EN12477 Type A

GUMMI-ROLLER S.a.r.l.

Zare est n°6,L-4385

Ehlerange

Luxembourg

www.roller-tech.eu

Glove description :

Brown cow grain leather palm ,brown cow split leather back and natural cow split leather cuff weld glove

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the PPE Regulation 2016/425 applicable from April 21th, 2018 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075)
4, rue Hermann Frenkel
69367 LYON Cedex 07
FRANCE

Applicable standards :

The glove meets the requirements of the standard EN 420 : 2003 + A1 : 2009 « General requirements for work glove ». Dexterity : 4

Moreover, this glove has been designed for the following applications :

Application :

Mechanical hazard - EN 388 : 2016



3 3 4 4 D

Levels of performance

Abrasion resistance	3	(on 4 maxi)
Blade cut resistance	3	(on 5 maxi)
Tear resistance	4	(on 4 maxi)
Puncture resistance	4	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	D	(A to F)
Impact Protection		

Application :

Thermal risk - EN 407 2004



41314X

Levels of performance

Burning behaviour	4	(on 4 maxi)
Contact heat	1	(on 4 maxi)
Convective heat	3	(on 4 maxi)
Radiant heat	1	(on 4 maxi)
Small splashes of molten metal	4	(on 4 maxi)
Large quantities of molten metal	X	(on 4 maxi)

EN 12477: 2001/A1:2005 :

Type A : Is recommended for applications without high dexterity

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

Protection limit :

This glove doesn't give a protection for a temperature over 100°C.

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

The levels of performance mentioned are only valid for the palm of the glove.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

For gloves with different layers of material, the performance levels are warranted only for the whole glove.

This model can't be used for arc welding.

These gloves do not provide protection against electric shock caused by defective equipment or live working, and the electrical resistance is reduced if gloves are wet, dirty or soaked with sweat, this could increase the risk.

There is no standardised test method at present for detecting U.V. penetration of materials for gloves but the current methods of construction of protective gloves for welders do not normally allow U.V. radiation penetration.

With arc welding installations, it is not possible to protect all parts conducting the welding voltage against direct contact for operational reasons. The gloves doesn't protect against electrical risks due to defected equipment or moisture.

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

For dulling during the cut resistance test, the coupe test results are only indicative while the TDM cut resistance test is the reference performance result.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Declaration of conformity :

Available on : <http://www.roller-tech.eu>